


# XL LOW-PROFILE HDG



XL 110 Low-Profile Hydraulic Detachable Gooseneck

# YOUR SOLUTIONS-BASED HAULING PARTNER

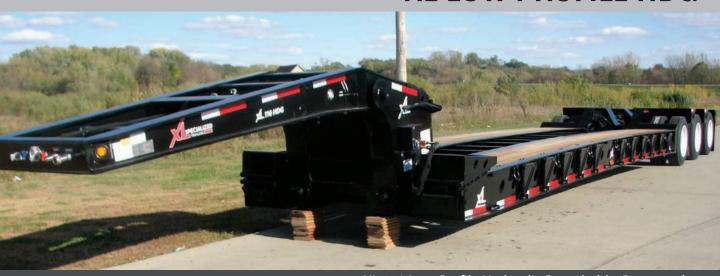

# **LOW-PROFILE ADVANTAGE**

The low-profile neck, a **26' long well and a rear transition with 32° slope** makes loading vehicles onto the rear deck of this unit extremely efficient. The XL Low-Profile HDG is specifically designed for hauling scrapers and equipment of all sizes.



#### VERSATILE DECK FEATURES

The XL 110 Low-Profile HDG deck is fully equipped for versatile hauling, with 13 chain drops per side, 7 bent D-rings per side, and removable heavy-duty swingout outriggers with heavy-duty flatback outriggers front and center.



# **DELUXE OPTION**

The Low-Profile HDG Deluxe package offers removable semi load-bearing wheel covers, 31" front flip ramps, 4" amber strobe light with battery backup box, 4 way plug at rear for strobe on FA to run off of battery backup, and a 13 HP unit with dual hydraulics.

#### **BUILT WITH YOU IN MIND**


- Lock pin automatically engages at every transport position for safe travel.
- 5 position ratchet-style ride height control adjusts height simply by moving a lever.
- Upper flange reinforcement strengthens the front ramp.
- Available with 54½" or 60" axle spacing
- 3rd axle lift raises axle for return trip, reducing tire wear.
- 2 chain slots on each bolster
- Frame reinforcement for Flip Axle
- Optional bolt on wheel covers can be removed for weight reduction.
- XL paint includes a full 1 year warranty.
- XL Specialized Trailers' HDG trailers feature a 5 year structural warranty.

# FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com



# XL110 LOW-PROFILE HDG: STANDARD SPEC



# XL110 LOW-PROFILEHDG

CAPACITY: 110,000 LB OVERALL CONCENTRATED: 110,000 LB IN 16' CONCENTRATED: 100,000 LB IN 10' OAL: 53' | OAW: 102"

### GOOSENECK

13'LOW-PROFILE SCRAPER STYLE NECK 51"5TH WHEEL HEIGHT 5 VARIABLE RIDE HEIGHT POSITIONS 110" & 84" SWING CLEARANCE 16" & 42" KING PIN SETTING HYDRAULICS RUN OFF OF WET KIT AIR OPERATED LOCK W/ MANUAL SAFETY LATCH BRACKETS FOR POWER UNIT

#### **GOOSENECK OPTIONS**

TOOLBOX IN REAR OF NECK W. STEEL DOOR 13HP HONDA UNIT, BASE OF NECK/TOP OF NECK, STEEL COVER, DUAL HYDRAULICS STEEL FENDERS ON SIDE OF GOOSENECK ALUMINUM FENDERS ON SIDE OF GOOSENECK REGISTRATION HOLDER

#### MAIN DECK

541/2" AXLE SPACING: 26' LONG 60" AXLE SPACING: 25' LONG T-I FLANGE, 80K WEB (4) 16" FULLY CAMBERED I-BEAMS 24" LOADED DECK HEIGHT 8" GROUND CLEARANCE 10" & 4" STUBBED JR. I-BEAMS ON 12" ALTERNATING CENTERS (7) BENT D-RINGS PER SIDE 13/8" APITONG DECKING RAISED -**OPEN CENTER** (13) CHAIN DROPS PER SIDE REMOVABLE HEAVY-DUTY SWING **OUT OUTRIGGERS ON 24" CENTERS HEAVY-DUTY FLAT BACK OUTRIGGERS** FRONT AND CENTER (2) FLAG HOLDERS BUCKET WELL AT REAR, PLATE ON BOTTOM FRONT RAMP UPPER FLANGE REINFORCEMENT

#### MAIN DECK OPTIONS

31" FRONT FLIP RAMPS
CENTER DECK COVERED
STORAGE COMPARTMENTS IN FRONT OF
MAIN DECK
OAK OUTRIGGER PLANKS, 2" X 10"

## REAR BRIDGE

54½" AXLE SPACING: 14' LONG
60" AXLE SPACING: 15' LONG
REAR TRANSITION WITH 32° SLOPE
40" LOADED DECK HEIGHT
OPEN WHEELS-BOLSTER STYLE
OPEN BOOM TROUGH
(2) FLAT D-RINGS ON MAIN BEAMS AT REAR
(2) CHAIN DROPS ON EACH BOLSTER
(2) FLAG HOLDERS
(2) STAKE POCKETS IN TAIL CHANNEL
FOR WIDE LOAD SIGN
FRAME REINFORCEMENT FOR BOOSTER

#### **REAR BRIDGE OPTIONS**

REMOVABLE WHEEL COVERS LOAD-BEARING
REMOVABLE WHEEL COVERS,
SEMI-LOAD BEARING
COVERED BOOM TROUGH BOLT ON BOTTOM PLATE
4" AMBER STROBE TAIL LIGHT
BATTERY BACK-UP W. 4-WAY PLUG FOR FA
WIDE LOAD SIGN - FIT IN STD BRACKETS
(1) 4-WAY PLUG AT REAR

# SUSPENSION

25,000 LB AIR RIDE RAISE AND LOWER VALVE MANUAL RIDE HEIGHT CONTROL

#### SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE AIR WEIGH DIGITAL SCALE

#### **AXLES**

(3) 25,000 LB NOMINAL 54½" SPACING AIR LIFT ON 3RD AXLE HUB PILOT, OUTBOARD DRUMS 16½" X 7" BRAKES AUTO SLACK ADJUSTERS LIMIT CHAINS ON ALL AXLES SPRING BRAKES ON 1 AXLE ABS NOT REQUIRED

#### **AXLE OPTIONS**

HUBOMETER DUST SHIELDS CAT EYE SYSTEMS

## WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS 255 / 70R / 22.5 H RATED TIRES

#### WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS (INSIDE)
ALUMINUM MILL WHEELS (OUTSIDE)
ALUMINUM POLISHED WHEELS (OUTSIDE)
CUSTOMER SPECIFIED TIRES
CUSTOMER SPECIFIED MUD FLAPS

### LIGHTING

D.O.T. APPROVED 12V SEALED GROTE HARNESS RUBBER MOUNTED LED LIGHTS (1) MID-TURN SIGNAL PER SIDE (2) CLEARANCE LIGHT PER SIDE 7 POLE ELECTRICAL SOCKET 2 TAIL LIGHT PACKAGE WITH ALUMINUM COVER

#### PAINI

FULL 1 YEAR WARRANTY BLACK, IH RED, OR NEW CAT YELLOW AIR & ELECTRIC DONE AFTER PAINT

#### **PAINT OPTIONS**

NON-STANDARD PAINT COLORS NON-STANDARD METALLIC PAINT

# **AVAILABLE MODELS**

XL 110 LOW-PROFILE HDG XL 110 LOW-PROFILE HDG: DELUXE PACKAGE

OTHER CUSTOM CAPACITIES AND OPTIONS ALSO AVAILABLE, ASK YOUR SALES REP FOR DETAILS