



ROTARY CUTTERS

There are 3 series in the line of Land Pride Rotary Cutters to meet your specific needs. Models include the 4-6 foot range, the tough medium-duty 5-7 foot, and the rugged heavy-duty 5-10 foot. The cutters handle tractor engines from 60-120 horse power and feature floating top links and protective front skirting. The reinforced deck slopes toward the rear to prevent flying debris.



PARALLEL ARM CUTTERS

Designed to “reach out” and cut along roadsides, over guardrails, down ditchbanks and along side ponds, Land Pride’s Arm Hydraulic Rotary Cutter is available in a 60" cutting width.

The parallel design of the RCP2560 enables the cutter to have constant altitude. When the 2 cylinders operating the arm are activated, the altitude of the deck does not change. Lift the cutter head up, in, or out to negotiate an obstacle and the cutter deck position remains constant, making your work efficient. Gain a reach of 186" horizontal, 137" vertical and 109" below ground level. The hydraulic breakaway feature pivots the arm backward to avoid obstacles and to protect the cutter arm.



Standard equipment includes a hydraulic pump driven by the tractor PTO, a flow control valve to compensate for various hydraulic systems and a shut off valve permitting maintenance without oil loss. The 35-gallon oil reservoir keeps the unit running cool, and the in-line filter continually cleans the oil each time it is returned to the reservoir. The optional electronic cylinder controls provide instant response for adjustments on the go.

ROTARY TILLERS

Land Pride American-made Rotary Tillers can turn hard ground into a picture perfect seedbed. These forward rotation tillers are available in five series and 21 different models. The smaller 10, 15 and 20 Series are designed for landscaping, nurseries, gardens and light and commercial use, while the heavier 25 and 35 Series can handle commercial applications for the landscaper, nursery, orchard or vegetable farmer.

Standard features include a heavy-duty box frame, adjustable lower hitch clevises, enclosed drive chain in oil and a formed rear panel. Center or offset mounting also provides versatility on most models.

Land Pride also offers a line of reverse-till rotary tillers for tougher ground conditions.





SOLID STAND SEEDERS

Solid Features...Solid Stand. The Land Pride Solid Stand Seeder's innovative design combines Land Pride quality with Great Plains grain drill technology. Engineered for precise seed metering with excellent seed placement, this tool can be used to plant a variety of grass seed in prepared seedbeds. The Primary Seeder's double roller system provides soil-to-seed contact for superior germination and emergence. Seeds are distributed between the rollers released in a full width pattern. The front rollers, comprised of 12-inch diameter cast iron rings, create an ideal seedbed by pulverizing cloded sand, forcing rocks and other debris into the soil. The 9 1/2 inch diameter rear roller is spring loaded for constant downpressure; firmly pressing the seed into the seedbed at just the right depth. The rear rollers are staggered to run down the center of the front row pattern, leaving a precision-planted seedbed.



PRIMARY SEEDER

Land Pride 15 Series Primary Seeder, PS1548, offers a 48" seeding width with a narrow profile; ideal for landscaping applications. This seeder features a ground driven metering system and offers the solid advantages of a full width-seeding pattern.

Also available in a 72" model, Land Pride's 15 Series Primary Seeders protect falling seed by offering watertight seedbox lids, wind guards and low seed drop. Our fluted seed cups offer precision metering and openings are easily adjusted to handle a variety of seed. Land Pride Seeders also feature all-welded seedboxes, easily accessible drive components, cast iron packing wheels and unmatched seeding rates.



OVERSEEDERS

Land Pride 48" and 72" Solid Stand Overseeders offer precise placement and seed-to-soil contact, making them ideal to overseed existing strands of grass and to establish new turf.

The three-way seed-to-soil contact system provides great germination and emergence with the solid advantages of a full width-seeding pattern. Your choice of straight or curved knives slice into the ground, creating slits to receive the seed. Straight knives pull up some of the thatch build-up, while the curved knives leave that undisturbed. Fluted seed cups precisely meter the amount of seed in a broadcast pattern, delivering outstanding metering accuracy. The solid cast-iron packer wheels finish the job by pressing and firmly packing the seed into the soil, eliminating most air pockets.






PTO POWERED RAKES

Three tools in one!

Land Pride's 3-Point Powered Rake, available in 60" and 72" models, is just right for the landscaper. Designed with 25 HP and above compact tractors in mind, the widths and close coupling make these units perfect for working around new housing construction sites, buildings and even roadside mowing. With two roller choices, an adjustable material control deflector and 15 degree left and right angling, the PR15 Series allows you to move dirt like a boxscraper, windrow locks like a rake and work the soil like a pulverizer – all in one tool!

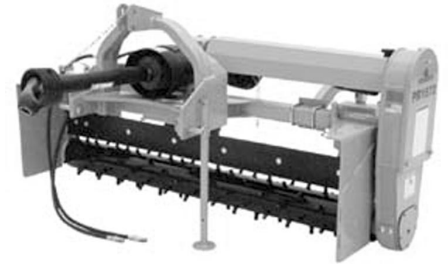

Gauge wheels can be adjusted to various working depths and the aggressive roller pulverizes clods down to the desired size. Larger clods and other debris can be windrowed to be discarded later. The adjustable material control blade determines the soil size to let through, and keeps the material flowing properly. When grading needs to be done, the end panels can be attached to hold dirt in and move it around.

GROOMING MOWERS

The aggressive high speed cutting blades of Land Pride's 26 Series Air Tunnel Grooming Mowers cut the grass cleanly and the air tunnel system discharges it efficiently, even in moist, rugged and tall grass conditions. The tunnel allows cut grass to move out of the way, and at the same time creates large volumes of air to discharge the grass and scatter it evenly out the side.

Available in three key widths of 60", 72" and 84", these Air Tunnel mowers feature vacuum-formed ABS belt guards and discharge chutes. The one piece tubing for the gauge wheel arms increases strength and adds to the overall appearance.



Floating lower hitch clevises and a floating top link work in conjunction with the front roller option and four gauge wheels, allowing the mower to follow ground contours. The welded steel chassis absorbs shock loads and greasable blade spindle bearings are placed in heavy-duty cast iron hubs for long wear.

Operation is convenient, with clevis hitch hook-up, and easy to adjust mowing height in 1/2" increments. Remote greasing of spindle hubs allows for easy maintenance and the overall Air Tunnel design allows for quick through cleaning and washing.



LANDPRIDE TREKER™

Land Pride Treker™ Utility Vehicles are designed to carry two people and a limited amount of gear or cargo comfortably and safely over rough or difficult off-road terrain.

The Treker introduces a whole new way to experience work, play and adventure. The four wheel independent suspension, constant variable transmission and on-command 4-wheel drive allow you to go places to get the job done, with comfort, stability and power.



Treker

LAND PRIDE RUNABOUT™

This may look like just another fun 'buggy' but fun is only part of the appeal. It's in a class by itself with professional features not found on small frame go-karts. The Runabout acts like an ATV, but has the look and feel of a "Whole New Adventure!"

Two people can travel and hunt comfortably, side-by-side, on Land Pride All-Terrain Runabout (ATR™); you can't do that with an ATV. Cargo racks allow for carrying and strapping your hunting gear, a backscreen allows for carrying additional back country necessities. With the engine and differential drive mounted directly over the rear axle, the Runabout can get you out of the stickiest situations.

The ATR is designed for off road use to carry two people and cargo comfortably and safely over rough terrain. The Runabout features a steering wheel with easy handling rack-and-pinion steering. Its four wheel independent suspension, large diameter hi-flotation tires and high center-frame ground clearance adds up to excellent stability and a smooth ride. Outstanding two wheeled rear traction drive is achieved by using premium off-road ATV type tires in tandem with the engine mounted directly over the rear differential.



Runabout




Land Pride Treker & Runabout

Model	Runabout	Treker
Front Suspension	Independent A-arms Coil/over Adjustable Shocks	Independent A-arms MacPherson Struts
Rear Suspension	Independent Trailing Arms Coil/over Adjustable Shocks	Independent Trailing Arms Coil/over Adjustable Shocks
Fenders	Integral w/Body	Front: Integral; Rear: Bed Mounted
Front Bumper	Standard	Standard
Front Brush Guard	Optional	Optional
Seating	Buckets - 2	Buckets - 2
4-Post Accessory Bar	Standard	Standard
Rear Hitch	2" Receiver	2" Receiver
Towing Capacity	400 lbs	NT: 1000 lbs; ST: 1200 lbs
Payload of Base Unit*	674 lbs	NT: 950 lbs; ST: 1300 lbs
Wheel Base	64"	NT: 70"; ST: 76"
Tread Center Front	41.5"	NT: 41.5"; ST: 47"
Tread Center Rear	42"	NT: 42"; ST: 47.5"
Width at Front Tires	48"	NT: 50"; ST: 56"
Width at Rear Tires	54"	NT: 50"; ST: 56"
Height OAL	63.5"	AT Tires: 71"; Turf Tires: 70"
Length OAL	94"	NT: 108"; ST: 120"
Outside Turn Circle	18'	NT: 20'3"; ST: 20'9"
Inside Turn Circle	9'	NT: 11"; ST 11'
Floorboard Height	13"	AT Tires: 14" ; Turf Tires 13"
Min. Ground Clearance	7 1/2"	7 1/2"
Tire Size (Front)	25x8-12 All-Terrain Tread	25x8-12 All-Terrain Tread; 23x8.5-12 Turf
Tire Size (Rear)	25x11-12 All Terrain Tread	25x11-12 All Terrain Tread; 23x10.5-12 Turf
Tire Pressure (Front)	7 psi	7 psi
Tire Pressure (Rear)	7 psi	7 psi
Optional Front Cargo Rack Capacity	160 lbs	160 lbs
Optional Rear Cargo Rack Capacity	40 lbs	
Approx. Curb Weight	726 lbs	4200NT: 925 lbs; 4400NT: 1050 lbs; 4200ST: 1000 lbs; 4400ST: 1150 lbs

*Payload includes passengers, does not include optional cargo racks



Grablight




Gunrack



Basket



Headrest



Rease Hitch