

## XL LOW-PROFILE HDG



XL 120 Low-Profile Hydraulic Detachable Gooseneck

### YOUR SOLUTIONS-BASED HAULING PARTNER



#### LOW-PROFILE ADVANTAGE

The 13' long low-profile neck features a 36" long flip neck for use with a four axle truck. The swing clearance is 146" with the flip neck down, allowing for weight to get distributed to the steer axle of the truck. A 26' long well and a rear transition with 32° slope makes loading vehicles onto the rear deck of this unit extremely efficient.



#### VERSATILE DECK FEATURES

The XL 120 Low-Profile HDG deck is fully equipped for versatile hauling, with 13 chain drops per side, 7 bent D-rings per side, and removable heavy-duty swingout outriggers with heavy-duty flatback outriggers front and center.



#### SUPERIOR WHEEL AREA DESIGN


With its open boom trough for an excavator arm, and the last three cross members of the main deck recessed to make a bucket well for the excavator arm, the XL Low-Profile HDG allows your equipment to ride lower without damaging the cylinder. Add bolt-on wheel covers for parking or loading on the wheel area.

#### BUILT WITH YOU IN MIND

- Lock pin automatically engages at every transport position for safe travel.
- 36" flip neck provides 146" of swing
- 5 position ratchet-style ride height control adjusts height simply by moving a lever.
- Available with 54½" or 60" axle spacing
- 3rd axle lift raises axle for return trip, reducing tire wear.
- 2 chain slots on each bolster
- Frame reinforcement for Two Axle Booster
- Optional bolt on wheel covers can be removed for weight reduction.
- XL paint includes a full 1 year warranty.
- XL Specialized Trailers' HDG trailers feature a 5 year structural warranty.

**FIND YOUR SPECIALIZED SOLUTION TODAY**  
visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

# XL 120 LOW-PROFILE HDG: STANDARD SPEC

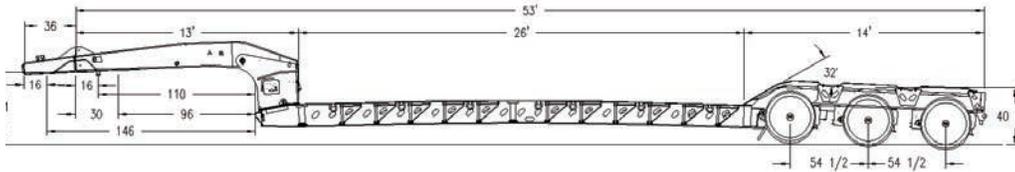

**XL 120 LOW-PROFILE HDG**  
CAPACITY: 120,000 LB OVERALL  
CONCENTRATED: 120,000 LB IN 16'  
CENTER OF DECK  
CONCENTRATED: 110,000 LB IN 10'  
OAL: 53' | OAW: 102"

## GOOSENECK

13' LOW-PROFILE SCRAPER STYLE NECK  
36" FLIP NECK (146" OF SWING)  
51" 5TH WHEEL HEIGHT  
5 VARIABLE RIDE HEIGHT POSITIONS  
110" & 84" SWING CLEARANCE  
16" & 42" KING PIN SETTING  
HYDRAULICS RUN OFF OF WET KIT  
AIR OPERATED LOCK W/ MANUAL  
SAFETY LATCH  
BRACKETS FOR POWER UNIT

## GOOSENECK OPTIONS

TOOLBOX IN REAR OF NECK W. STEEL DOOR  
13HP HONDA UNIT, BASE OR TOP OF NECK,  
STEEL COVER, DUAL HYDRAULICS  
STEEL FENDERS ON SIDE OF GOOSENECK  
ALUMINUM FENDERS ON SIDE OF  
GOOSENECK  
REGISTRATION HOLDER  
FLIP NECK DEDUCT

## MAIN DECK

54½" AXLE SPACING: 26' LONG  
60" AXLE SPACING: 25' LONG  
T-1 FLANGE, 80K WEB  
(4) 16" FULLY CAMBERED I-BEAMS  
24" LOADED DECK HEIGHT  
8" GROUND CLEARANCE  
10" & 4" STUBBED JR. I-BEAMS ON  
12" ALTERNATING CENTERS  
31" FRONT FLIP RAMPS  
(7) BENT D-RINGS PER SIDE  
1¾" APITONG DECKING RAISED -  
OPEN CENTER  
(13) CHAIN DROPS PER SIDE  
HEAVY-DUTY SWING OUT OUTRIGGERS  
ON 24" CENTERS  
HEAVY-DUTY FLAT BACK OUTRIGGERS  
AT FRONT  
(2) FLAG HOLDERS  
BUCKET WELL AT REAR, PLATE ON BOTTOM  
FRONT RAMP UPPER FLANGE  
REINFORCEMENT

## MAIN DECK OPTIONS

31" FRONT FLIP RAMPS  
28' LONG (MAKES TRAILER 55' LONG  
OVERALL)  
CENTER DECK COVERED  
STORAGE COMPARTMENTS IN FRONT OF  
MAIN DECK  
OAK OUTRIGGER PLANKS, 2" X 10"

## REAR BRIDGE

54½" AXLE SPACING: 14' LONG  
60" AXLE SPACING: 15' LONG  
REAR TRANSITION WITH 32° SLOPE  
40" LOADED DECK HEIGHT  
OPEN WHEELS-BOLSTER STYLE  
OPEN BOOM TROUGH  
(2) FLAT D-RINGS ON MAIN BEAMS  
AT REAR  
(2) CHAIN DROPS ON EACH BOLSTER  
(2) FLAG HOLDERS  
(2) STAKE POCKETS IN TAIL CHANNEL  
FOR WIDE LOAD SIGN  
FRAME REINFORCEMENT FOR  
2 AXLE BOOSTER

## REAR BRIDGE OPTIONS

REMOVABLE WHEEL COVERS HEAVY-DUTY  
COVERED BOOM TROUGH -  
BOLT ON BOTTOM PLATE  
4" AMBER STROBE TAIL LIGHT  
BATTERY BACK-UP W. 4-WAY PLUG FOR FA  
WIDE LOAD SIGN - FIT IN STANDARD BRACKETS  
(1) 4-WAY PLUG AT REAR

## SUSPENSION

25,000 LB AIR RIDE  
RAISE AND LOWER VALVE  
MANUAL RIDE HEIGHT CONTROL

## SUSPENSION OPTIONS

LIQUID FILLED AIR GAUGE  
AIR WEIGH DIGITAL SCALE

## AXLES

(3) 25,000 LB NOMINAL  
54½" OR 60" AXLE SPACING  
AIR LIFT ON 3RD AXLE  
HUB PILOT, OUTBOARD DRUMS  
16½" X 7" BRAKES  
AUTO SLACK ADJUSTERS  
LIMIT CHAINS ON ALL AXLES  
SPRING BRAKES ON 1 AXLE  
ABS NOT REQUIRED

## AXLE OPTIONS

HUBOMETER  
DUST SHIELDS  
CAT EYE SYSTEMS

## WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS  
255 / 70R / 22.5 H RATED TIRES

## WHEEL AND TIRE OPTIONS

ALUMINUM MILL WHEELS (INSIDE)  
ALUMINUM MILL WHEELS (OUTSIDE)  
ALUMINUM POLISHED WHEELS (OUTSIDE)  
CUSTOMER SPECIFIED TIRES  
CUSTOMER SPECIFIED MUD FLAPS

## LIGHTING

D.O.T. APPROVED 12V SEALED  
GROTE HARNESS  
RUBBER MOUNTED LED LIGHTS  
(1) MID-TURN SIGNAL PER SIDE  
(2) CLEARANCE LIGHT PER SIDE  
7 POLE ELECTRICAL SOCKET  
2 TAIL LIGHT PACKAGE WITH  
ALUMINUM COVER

## PAINT

FULL 1 YEAR WARRANTY  
BLACK, IH RED, OR NEW CAT YELLOW  
AIR & ELECTRIC DONE AFTER PAINT

## PAINT OPTIONS

NON-STANDARD PAINT COLORS  
NON-STANDARD METALLIC PAINT

## AVAILABLE MODELS

XL 80 LOW-PROFILE HDG  
XL 110 LOW-PROFILE HDG  
XL 110 LOW-PROFILE HDG: 18" DECK HEIGHT  
XL 120 LOW-PROFILE HDG

**OTHER CUSTOM CAPACITIES AND  
OPTIONS ALSO AVAILABLE,  
ASK YOUR SALES REP FOR DETAILS**